



Grubenheizung für Estrich

Floor heating for screed


CHAIRKIT
PRERIDE TO PERFORMANCE

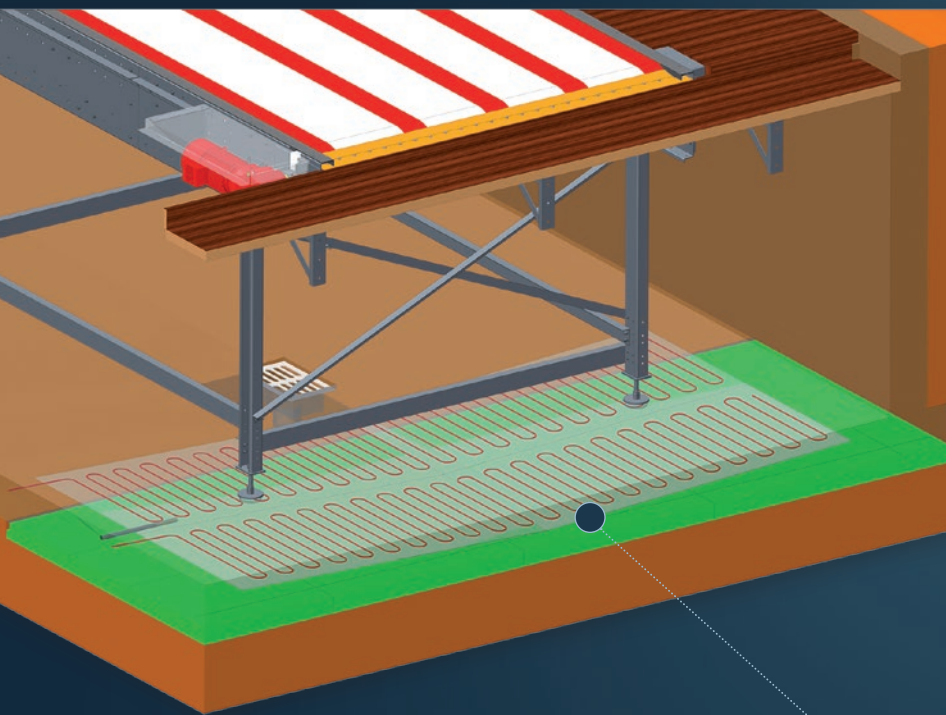

- >> Heizmatten werden im Betonfundament verlegt
 - >> Keine Schneeanhäufung in der Förderbandgrube
 - >> Heizleistung 400 W/m², mit Temperaturfühler geregelt
 - >> Heizzonen mit 2 m Länge und Breite der Förderbandgrube, einzeln schaltbar
 - >> Standardabmessungen für CK-Anlagen vorhanden – Sonderabmessungen möglich
 - >> Verlegeanleitung im Set inkludiert
-
- >> *Concrete-imbedded heating mats*
 - >> *Limits snow build-up on conveyor pit floor*
 - >> *Each zone individually controlled with its own temperature probe*
 - >> *Heating output of 400 W/m² using 230V 1ph supply power*
 - >> *Each zone 2 meters long and spans full width of conveyor pit*
 - >> *Standardized layouts available for CK conveyors; custom layouts & configurations on request*
 - >> *Installation instructions included*

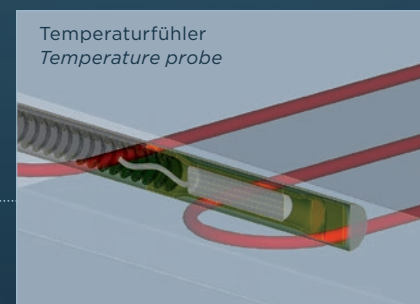

Temperaturfühler
Temperature probe

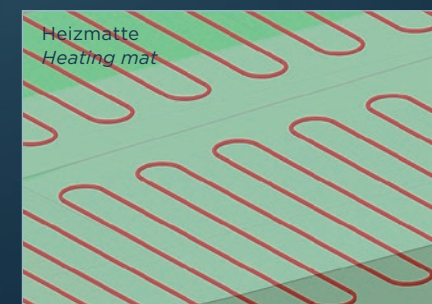

Heizmatte
Heating mat

CHAIRKIT Fördertechnik GmbH

Brixentaler Straße 59
A-6300 Wörgl
T +43 5332 764 83
F +43 5332 732 46
office@chairkit.com

CHAIRKIT Office Germany

Freisinger Straße 29
D-85435 Erding
T +49 8122 9822-0
F +49 8122 9822-22
office@chairkit.com

CHAIRKIT USA

1919 Willamette Falls Dr.
West Linn, OR 97068
T +1 503 780 90 36
F +1 360 838 17 49
office.usa@chairkit.com

The only kit your chair needs.

www.chairkit.com